

FIRETRACE®

STANDARD PRICE LIST – January 2012

Automatic Fire Suppression Systems

Direct Low Pressure Systems (DLP) (Discharge via Trace detection tube)

To protect enclosed volume not exceeding:-	Filled with ABC dry powder	Filled with FE-36 or Novec™ 1230 clean extinguishant	Filled with CO ² fitted with direct valve	Fitted with standard Trace detection tube or Isolate valve*
1 cubic metre	£310.00 (1kg)	£436.00 (1kg)	£498.00 (2kg)	3 metres long
2 cubic metres	£334.00 (2kg)	£570.00 (2kg)	£644.00 (5Kg)	4 metres long
4 cubic metres	£448.00 (4kg)	£898.00 (4kg)	Use Indirect	5 metres long

*For non standard or extendable systems with isolate valve add Trace detection tube @ £8.00 per metre
 Pressure switch £66.00 (for plant shutdown or alarm initiation) Two port head assembly (for second trace tube) £20.00
 For electrical ducting or small enclosures see Pyroflex range overleaf

Indirect Low Pressure Systems (ILP) & Indirect High Pressure (IHP) (Discharge via diffusers)
 For use with large volumes or exposed risks

Cylinder Size	Powder	FE-36/Novec™ 1230	CO ² (IHP)	AFFF Foam
2kg	£448.00	£680.00	£620.00	N/A
4kg	£560.00	£1004.00	N/A	N/A
5kg/5lt	N/A	£1116.00	£748.00	£582.00
6kg	£582.00	£1248.00	N/A	N/A
9kg/9lt	£620.00	£1562.00	£914.00	£606.00
22.5kg	N/A	N/A	£1284.00	N/A
45kg	N/A	N/A	£1390.00	N/A

For engine compartments or ventilated risks please allow additional extinguishant

Plus:-	Diffuser kit (including 8mm steel discharge tube and fittings)	£68.00 each
Plus:-	Firetrace Detection Tube (6mm Red FT0115)	£8.00 per metre
Optional	NO/NC Pressure switch (for plant shutdown or alarm initiation)	£66.00
	Twin Pressure switch (FT0124/T75)	£98.00
Extras	Self-contained alarm sounder (FT0178)	£64.00
	CO² Direct/Indirect (FT0168) or Bi-Directional Adapter (FT0168/1)	£96.00
	Manual Override (FT0256)	£96.00
	Electrical Override (FT0266)	£96.00

All prices are subject to VAT. (UK mainland carriage paid for orders over £100)

Account holders terms: Nett 28 days. Credit Cards accepted

All systems CE marked & fully compliant with PED

Telephone: 01473 744090 FAX: 01473 744901

Please visit our web site:- www.firetrace.co.uk Email: info@firetrace.co.uk




Firetrace Ltd

Unit 22 Knightsdale Road – Ipswich – Suffolk - IP1 4JJ


Issue 5-January 2012



ISO 9001:2008
 Cert No. GB00276

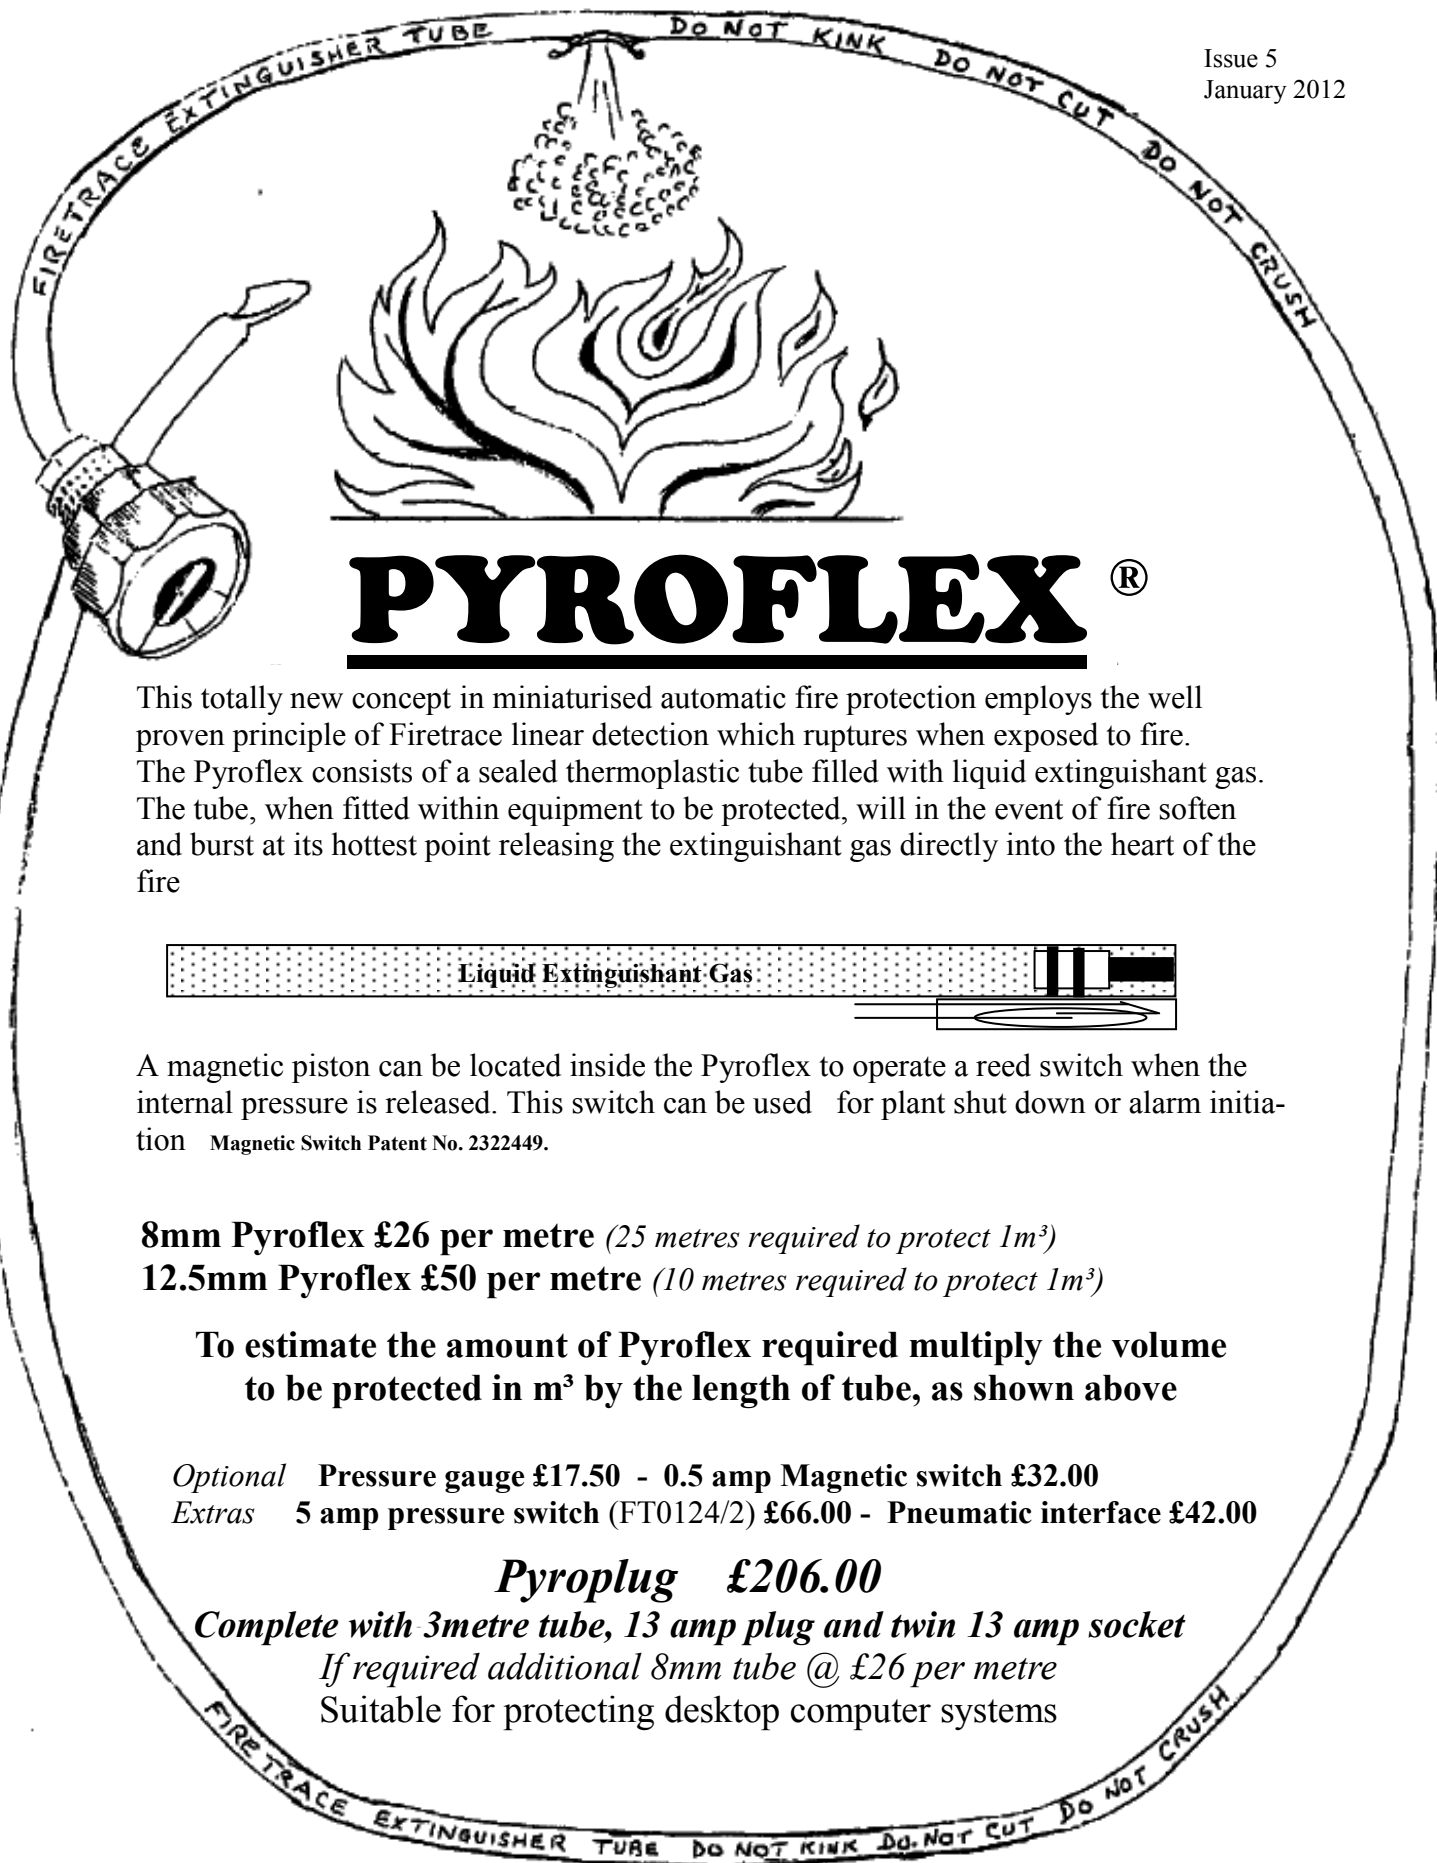

This totally new concept in miniaturised automatic fire protection employs the well proven principle of Firetrace linear detection which ruptures when exposed to fire. The Pyroflex consists of a sealed thermoplastic tube filled with liquid extinguishant gas. The tube, when fitted within equipment to be protected, will in the event of fire soften and burst at its hottest point releasing the extinguishant gas directly into the heart of the fire



A magnetic piston can be located inside the Pyroflex to operate a reed switch when the internal pressure is released. This switch can be used for plant shut down or alarm initiation Magnetic Switch Patent No. 2322449.

8mm Pyroflex £26 per metre (25 metres required to protect 1m³)

12.5mm Pyroflex £50 per metre (10 metres required to protect 1m³)

To estimate the amount of Pyroflex required multiply the volume to be protected in m³ by the length of tube, as shown above

Optional Pressure gauge £17.50 - 0.5 amp Magnetic switch £32.00

Extras 5 amp pressure switch (FT0124/2) £66.00 - Pneumatic interface £42.00

Pyroplug £206.00

Complete with 3metre tube, 13 amp plug and twin 13 amp socket

If required additional 8mm tube @ £26 per metre

Suitable for protecting desktop computer systems

Telephone: 01473 744090 Fax: 01473 744901

Please visit our website:- www.firetrace.co.uk Email:- info@firetrace.co.uk

Firetrace Detection Patent No. Europe. 923032650. USA. 5276433.

Pyroplug Patent No. 2292850. FryerTrace Patent No. GB 2438370.